


XVT

Xtreme Value Tower Series UPS



The **Xtreme Value Tower Series (XVT)** Uninterruptible Power Supply (UPS) provides the ideal power protection solution for servers, VoIP equipment, business telephone systems, desktops and other network grade equipment. The **XVT Series** is comprised of four models: 600VA, 800VA, 1200VA and 1500VA. Xtreme Value is achieved by providing features commonly available in UPS of twice the cost. These Line-Interactive network grade UPS are provided at prices commonly seen in standby or off-line UPS. Xtreme Reliability and more VA for the money makes the **XVT Series** the best choice in network power.

- **Network Grade Power Protection**
Best cost to performance ratio in four optimal sizes
- **Line-Interactive Technology**
Provides Automatic Voltage Regulation (AVR) to protect sensitive equipment
- **Longer Runtimes than the competition**
Provides more power during outages
- **USB Communications & Software CD**
Allows "plug & play" communications between servers, desktops & the UPS
- **Outstanding Warranty**
2 Year Electronics Warranty
- **More Outlets**
Greater Flexibility via (3) battery protected & (3) surge protected
- **Longer Battery Life**
Wide operating voltage range means less use of batteries, making them last longer

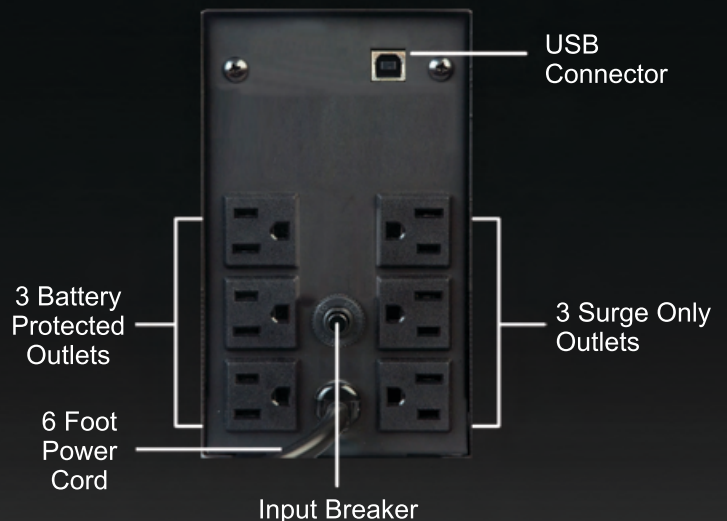

Xtreme value, Xtreme performance, Xtreme reliability



XVT SPECIFICATIONS

| | 120V Model | XVT-600 | XVT-800 | XVT-1200 | XVT-1500 |
|---------------------|-------------------------|---|----------------------|----------------------|----------------------|
| INPUT | Voltage | 94V-144V ± 5V | | | |
| | Capacity VA (W) | 600 VA (360 W) | 800 VA (480 W) | 1200 VA (720 W) | 1500 VA (900 W) |
| | Frequency | 60HZ ± 5Hz | | | |
| OUTPUT | Voltage | 105-134 VAC (120V ± 12%) | | | |
| | Waveform | Pure Sine Wave (Typical) | | | |
| | Frequency | AC mode-follow utility Battery mode 60 ± 0.5Hz | | | |
| | Transfer Time | 4ms (Typical) | | | |
| | Surge Protection | 320 Joules | | | |
| | Input Protection | Compliance with IEEE 587 | | | |
| | Short Circuit | Breaker | | | |
| BATTERY | Battery Type | Sealed, Maintenance-free lead acid | | | |
| | Battery Quantity & Size | (1) 12V 7AH | (1) 12V 9AH | (2) 12V 7AH | (2) 12V 9AH |
| | Recharge | Less than 10 hours to 100% capacity (2 hours typical) | | | |
| | Backup Time | 3 min (100% load) ≥ 8 min (50% load) | | | |
| | Charge Current | 1.5A (Max) | | | |
| PHYSICAL | Dimensions | W x D x H (inches) | W x D x H (inches) | W x D x H (inches) | W x D x H (inches) |
| | Product Dimensions | 3.7" x 14.6" x 6.2" | 3.7" x 14.6" x 6.2" | 4.9" x 16.9" x 8.7" | 4.9" x 16.9" x 8.7" |
| | Shipping Dimensions | 6.1" x 16.2" x 10.2" | 6.1" x 16.2" x 10.2" | 7.5" x 18.9" x 12.8" | 7.5" x 18.9" x 12.8" |
| | Unit Weight | 15.3 lbs. | 16.8 lbs. | 27.6 lbs. | 31.3 lbs. |
| | Shipping Weight | 17.6 lbs. | 19.2 lbs. | 29.8 lbs. | 32.4 lbs. |
| | Line Cord (6 ft.) | NEMA 5-15P | | | |
| | Receptacles | (6) NEMA 5-15R (3-SURGE PROTECTED/3-UPS) | | | |
| | Communication Interface | USB | | | |
| | Bezel Color | Brushed Metallic Outer / Black Inner | | | |
| | Included in box | PowerManager CD, USB cable, Manual | | | |
| ENVIRONMENT | Operating Temperature | 0-40°C | | | |
| | Humidity | 0%-90% | | | |
| | Audible Noise | <45dBA | | | |
| | Altitude | 5000 ft. (1500 m) above sea level | | | |
| WARRANTY | Warranty | Two years electronics / One year batteries | | | |
| APPROVALS | North America | UL cUL FCC | | | |
| INDICATORS & ALARMS | AC Mode | Green LED on, Orange LED on, Red LED off, no beep | | | |
| | Charging Battery | Orange LED on | | | |
| | Battery Mode | Green LED and Orange LED off, Red LED flash, buzzer slow beep | | | |
| | Battery Low | Green LED and Orange LED off, Red LED, buzzer fast beep | | | |