


UNINTERRUPTIBLE POWER SYSTEMS



RemotEye® II & III

XT

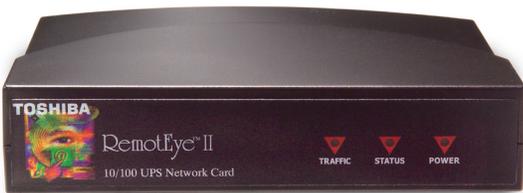

- Provides Management of UPS through Web Browser
- Provides Management of UPS through SNMPv1 & SNMPv3
- Supports Flash-Upgrade through Network
- Provides Shutdown of Remote Client on LAN
- Provides Versatile Power Management Control
- Provides Email Notification of UPS Status & UPS Events
- Provides Remote Control of UPS through Internet

TOSHIBA RemotEye Web/SNMP Network Adapter

Versatile Power Management

RemotEye® is your complete Toshiba UPS management solution. RemotEye® is a tool designed to control and monitor your Toshiba UPS remotely via the Simple Network Management Protocol (SNMP) and Hypertext Transfer Protocol (HTTP/web browser) methods. In addition, when a power outage occurs, a notification can be automatically sent to a network administrator or maintenance personnel. Should a prolonged power outage occur, RemotEye® can initiate an orderly shutdown to connected servers to minimize any risk of data loss.

SNMP Ability

The RemotEye® supports SNMPv1 and SNMPv3 and provides an SNMP interface for Toshiba UPS. This allows easy integration of UPS management into an existing SNMP network management system. At any given time, SNMP queries can poll the RemotEye® for the current status of the connected UPS.

HTTP Familiarity

The RemotEye® provides an HTTP interface for a UPS. This allows for easy access of UPS information from any machine with a web browser. Any network workstation or management station can open the RemotEye® website to allow UPS information to be configured and monitored. RemotEye® also provides access to three java applets for monitoring, event login, and trend analysis. The RemotEye® also supports secure socket layer (SSL) for web security.

Shutdown Capability

The RemotEye® also includes application software. This allows the RemotEye® to notify and shutdown important network servers. Through the existing network connections, RemotEye® can handle your unattended server shutdown needs.


E-mail Notification

The RemotEye® can also provide email notification of UPS status and events to designated email recipients. Through the RemotEye® website, a notification can be emailed with an events log, status report, or both attached. The daily status report provides the UPS's condition over the last 24 hours. This option can be programmed to be sent out at a specific time of day.

Options- Environmental Monitoring Device (EMD) & RemotRadar

EMD- Temperature and humidity sensors provide complete environmental monitoring. This EMD device also provides two sets of user-defined dry contacts for monitoring. The EMD part number is RMTI-EMD-HT.

RemotRadar- RemotRadar provides real-time monitoring and managing of up to 1,024 RemotEye® and Remote-D devices at once.

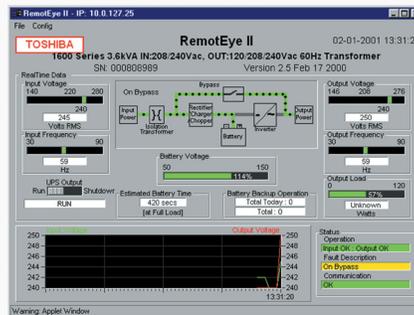

The monitor applet offers real-time analysis of UPS operation.



RemotEye's web interface allows a user to view the protected machines RemotEye oversees.

RemotEye® II & III			
Model Numbers	RMTI-3	RMTI-INT-R4 (Internal)	RMTI-EXT-R4 (External)
Supports Toshiba UPS	1600XP	1000, 16000EP, 1700 & 18000	All Current UPS Product Series Except 1600XP
Package Content	6-Foot PC Cable, CD with User Manual, MIB Files, & Program Files		120 VAC Adapter, 5-Foot Cord, 6-Foot PC Cable, 6-Foot UPS Cable, CD with User Manual, MIB Files, & Program Files
Network Port	Auto Sensing 10/100 Mbps Fast Ethernet RJ-45 Lan Connector		
Serial Port	One Asynchronous Serial Port		Two Asynchronous Serial Ports
Network Protocol	SNMP Over UDP/IP : HTTP Over TCP/IP : Telnet, ARP, RARP, TFTP, & ICMP		
Network Security	SNMPv3, SSL, & SSH		
Supported MIB	Toshiba MIB : JEMA MIB : RFC 1628		
Operating Environment	Temperature: 0° to 40°C; Humidity: 10 to 80%		
Power Input	8 to 15 VDC Unregulated		12 VDC Unregulated
Power Consumption	3 Watts Maximum		
Size	2.6" x 2.4" x 0.8" (L x W x H)	5.1" x 2.4" x 0.7" (L x W x H)	5.4" x 3.5" x 1.2" (L x W x H)
Weight	0.2 Lbs. (80 gm)		0.38 Lbs. (170 gm)
Regulatory	CE, FCC Class B		
Warranty	Two Years		

UPS ADJUSTABLE SPEED DRIVES MOTORS CONTROLS INSTRUMENTATION PLC

TOSHIBA

Available Through:

TOSHIBA INTERNATIONAL CORPORATION

INDUSTRIAL DIVISION

13131 West Little York Road, Houston, Texas 77041

Tel (713)466-0277 Fax (713)892-5212

US (800)231-1412 Canada (800)872-2192 Mexico 01(800)527-1204

www.toshiba.com/ind

Copyright 04/2010

